


METAL FLANGE

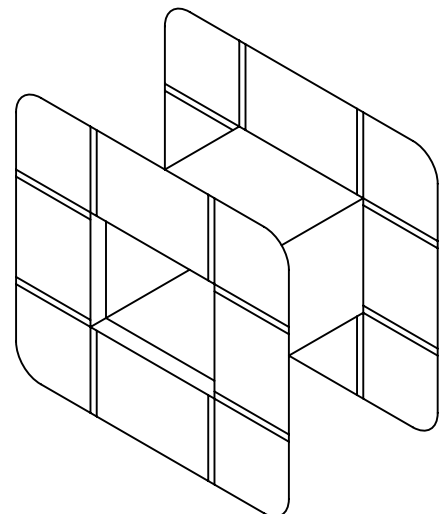

DOUBLE SKIRT

Note 1:
Metal Flanged Scuppers are back-sealed using the factory supplied mastic behind the flange.

Note 2:
Sealant must be applied around the interior of the scupper before installing the scupper liner.

Note 3:
See detail 2041 for the appropriate interior wall termination.

DATE: JANUARY 2009

DRAINAGE DETAILS

DRAWN BY: ENG. DEPT.

METAL FLANGE & 2 SKIRT SCUPPER

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF