




DURO-LAST, INC.

525 Morley Drive
Saginaw, MI 48601

DETAIL 4200

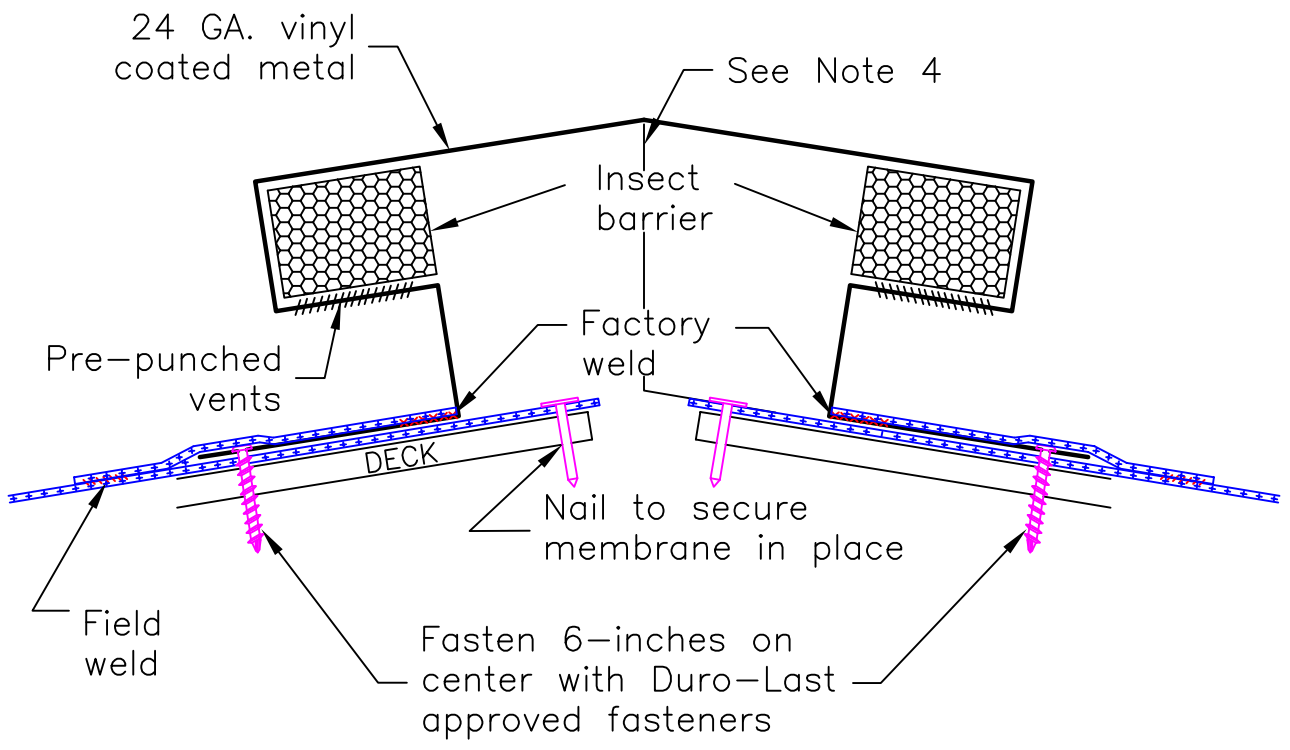

- Note 1: Vented Ridge Cap comes in 10-foot lengths with a factory welded 6-inch skirt on each side. Splice plates are used to join sections.
- Note 2: For new construction and re-roof installations, contractor shall follow local building code to determine the opening needed at the ridge under the vented ridge cap.
- Note 3: Duro-Last deck sheet must be installed prior to the installation of the vented ridge cap.
- Note 4: 16 GA. support chair brackets are required at 5-foot on center.

DATE: APRIL 2010	VINYL COATED METAL
DRAWN BY: ENG. DEPT.	VENTED RIDGE CAP
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF