




DURO-LAST, INC.

525 Morley Drive
Saginaw, MI 48601

DETAIL 6056

Hex-head screws
with neoprene washer
(24-inches on center max)

Pittsburgh Seam
18 GA. splice cleat
Metal/Aluminum
arched coping cap

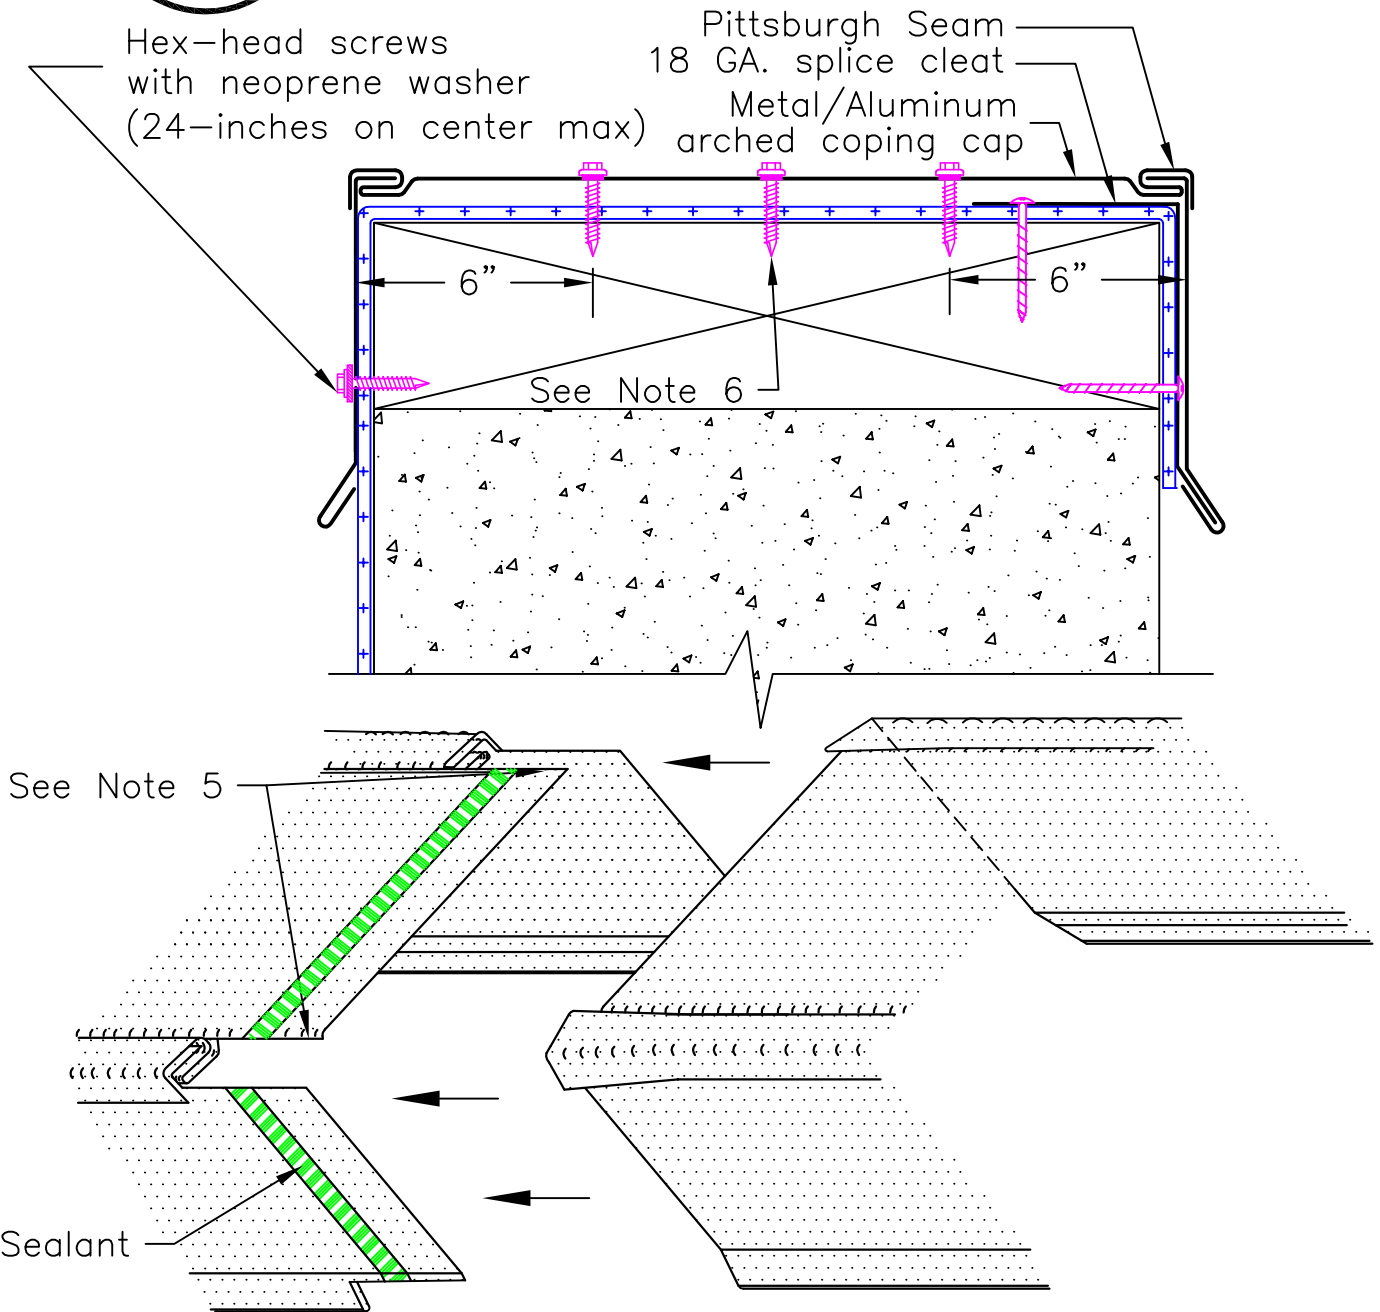

- Note 1: Install Duro-Last parapet flashing per detail 6010.
- Note 2: All coping cap joints must utilize a 4-inch splice cleat.
- Note 3: All joints are to be sealed with an approved Duro-Last sealant.
- Note 4: Splice cleats are installed 24-inches on center using four Duro-Last approved fasteners.
- Note 5: Edges pre-notched for an overlapped joint.
- Note 6: Coping wider than 16-inches require additional top fasteners. See installation detail 6056.

DATE: APRIL 2010

PARAPET WALL DETAIL

DRAWN BY: ENG. DEPT.

ARCHED COPING W/SPLICE CLEAT

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF