


Duro-Last® Metal Finishes

All finishes are Kynar 500® PVDF or Hylar 5000® PVDF prefinished 24 gauge Galvalume steel.

STANDARD COOLR®

ENERGY EFFICIENT ROOFING METAL

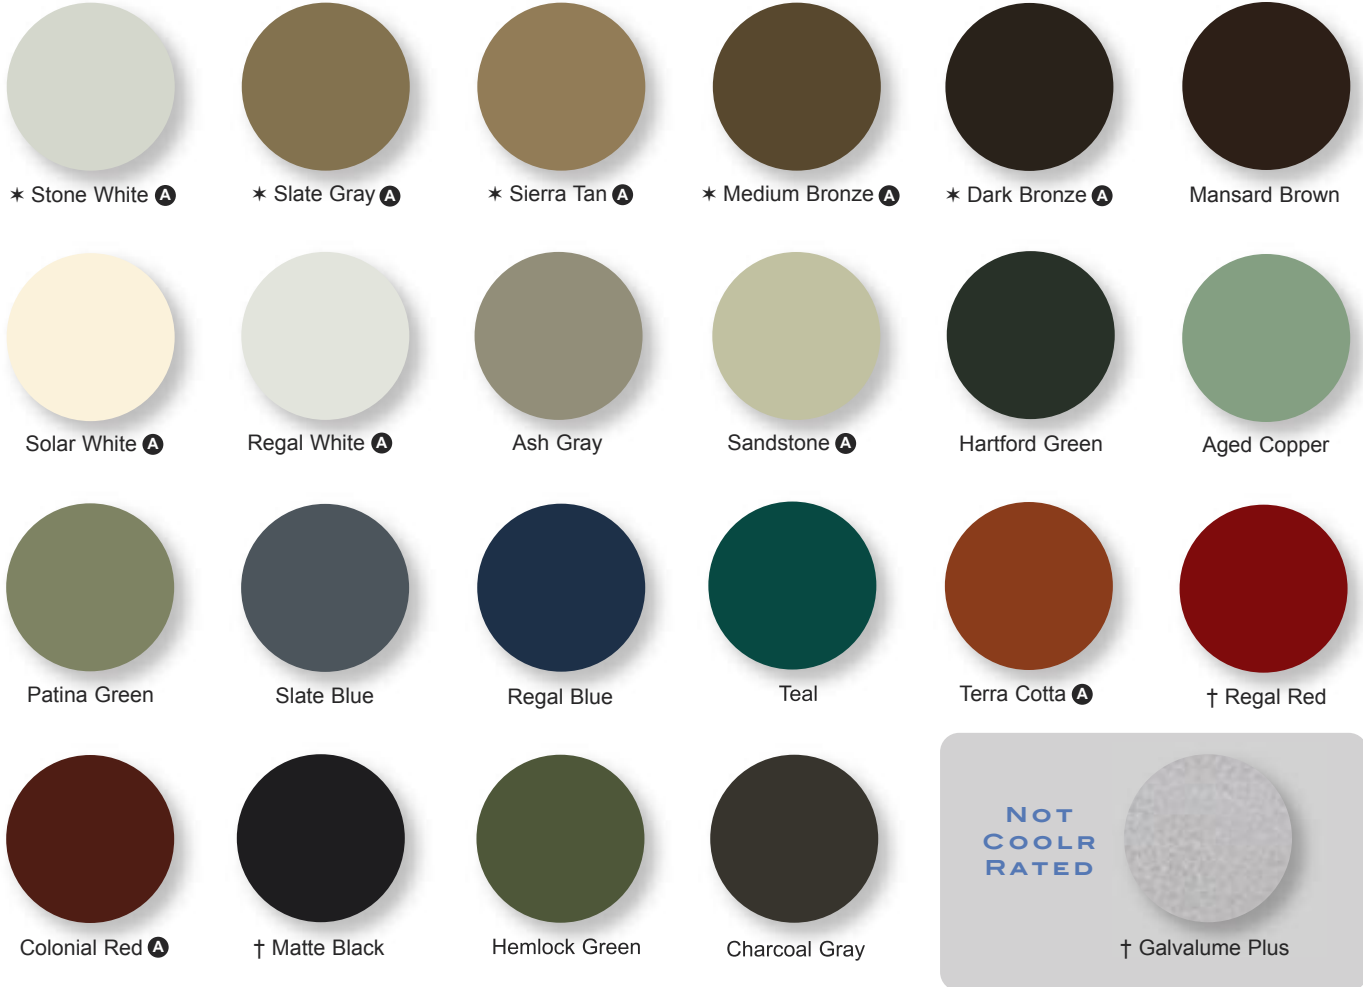

PREMIUM COOLR®

ENERGY EFFICIENT ROOFING METAL



* Gravel stop covers, 2-piece compression metal and fascia bar covers ordered in these finishes are available within five business days. Products ordered in all other finishes may require additional fabrication time.

◆ Available at additional cost.

▲ Available in .040 Aluminum.

† A 10-year limited warranty is available for Regal Red, Matte Black, and all metallic finishes.

Specially ordered products will be filled as quickly as possible and shipped separately. Call for quotes.

800-248-0280
www.duro-last.com



COOLR® is a registered trademark of Sheffield Metals International.



FILE PROPERTY	TEST METHOD	COOLR® PAINT
Color Availability		See Reverse Side
Warranty		20-Year Limited
Solar Spectrum Reflectivity	Solar Spectrum Reflectometer to ASTM C-1549	Varies By Color
Thermal Emittance	ASTM C-1371	Varies By Color
Abrasion Coefficient	ASTM D-968	67 Liters +/- 10
Adhesion (Crosshatch and X-Cut)	ASTM D-3359	No Loss
Chemical Resistance	ASTM D-1308 Procedure 7.2	10% Hydrochloric Acid 24-Hour = No Visible Change 20% Hydrochloric Acid 18-Hour = No Visible Change 20% Sulfuric Acid 18-Hour = No Visible Change 25% Sodium Hydroxide 1-Hour = No Visible Change 20% Muriatic Acid 15 Minutes = No Visible Change
Color Uniformity (Non-Metallics)	ASTM D-2244	Color controlled instrumentally and/or visually
Erosion	10 years 45° South Florida	0.1 Mills or Less in 20 Years
Weathering-Chalk Resistance	ASTM D-659	Maximum Rating 8
Weathering-Color Retention	ASTM D-2244	Maximum 5 Hunter Delta E Units Color Change - Not Applicable for Metallics, Regal Red, or Matte Black
Direct Impact Flexibility	ASTM D-2794	Excellent, no removal
Reverse Impact Flexibility	ASTM D-2794	Excellent, no cracking, no film removal
Pencil Hardness	ASTM D-3363	HB Minimum
Salt Spray Resistance	ASTM B-117	1,000 Hours Scribe: 7 - 1/16" Blisters Field 10: No Blisters
Humidity Resistance	ASTM D-2247	2,000 Hours Rating 10: No Blisters
Specular Gloss	ASTM D-523	60° = 20-35
Tunnel Test	ASTM E-84	Class A coating
Recycled Content	N/A	25%
ENERGY STAR® Compliant		Meets ENERGY STAR® requirements (Steep Slope)

A 20-year limited warranty is available on most finishes.

A sample warranty is available upon request.



Colors shown are matched as accurately as possible, but may vary slightly from finished product.

"Duro-Last" and the "World's Best Roof" are registered marks owned by Duro-Last Roofing, Inc.

Kynar 500® PVDF is a registered trademark of ElfAtochem North America, Inc.

Hylar 5000® PVDF is a registered trademark of Solvay Solexis, Inc.



The Duro-Last® roofing system is proudly manufactured in the United States of America.